

KITO

Beam clamp TK Model

Up to 10 t

Safe and rugged




- > Unique shackle design
- > New rugged design
- > Wide range of capacities
- > Optimized handling for textile slings
- > Galvanized screw shaft corrosion resistant
- > High surface contact jaws distribute load evenly
- > Suitable for angle pulling
- > Self-centering shaft


**Designed and
manufactured
in Europe!**

KITO HOISTS
Always on the safe side

Kito Europe GmbH
 Heerdter Lohweg 93
 D-40549 Düsseldorf
 Tel. +49 (0)211 - 52 80 09 - 0
 Fax +49 (0)211 - 52 80 09 59
 info@kito.net
 www.kito.net

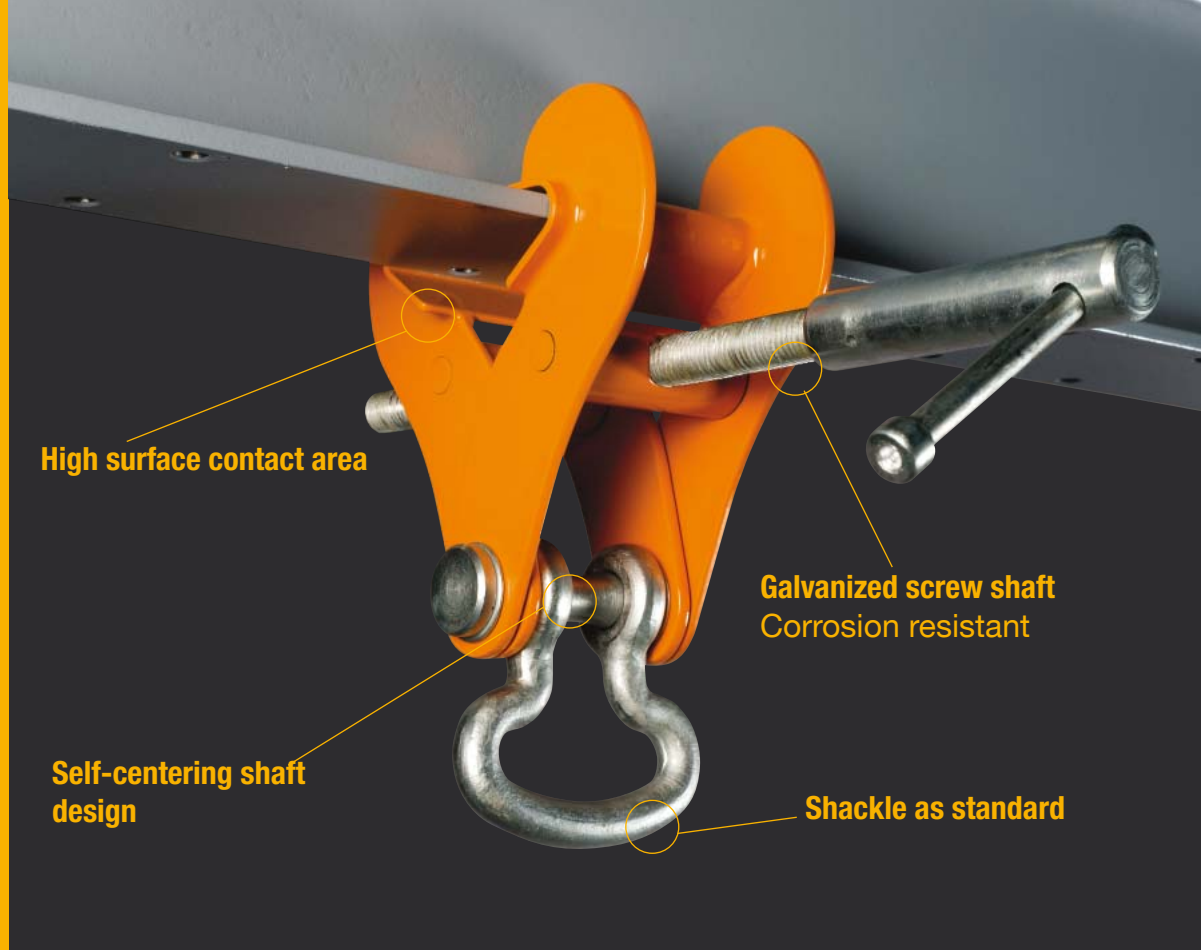

KITO HOISTS
 Always on the safe side

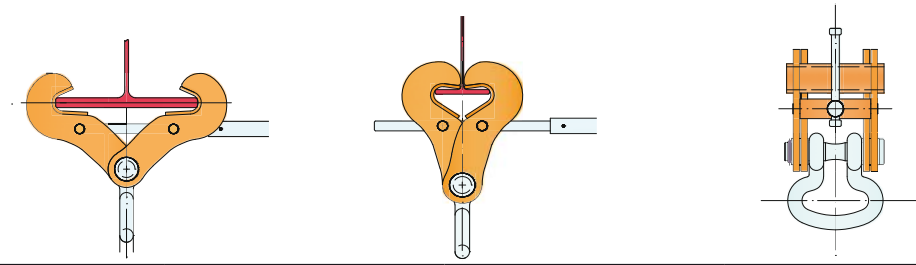

| Type | WLL (kg) | Flange width (mm) | Weight (kg) | Headroom (mm) |
|--------|----------|-------------------|-------------|---------------|
| TK010A | 1000 | 75-230 | 4,0 | 207 |
| TK020A | 2000 | 75-230 | 5,3 | 205 |
| TK030A | 3000 | 75-230 | 9,0 | 254 |
| TK030B | 3000 | 140-320 | 11,0 | 284 |
| TK050A | 5000 | 75-230 | 11,0 | 265 |
| TK050B | 5000 | 140-320 | 13,5 | 283 |
| TK075A | 7500 | 90-320 | 20,0 | 328 |
| TK100A | 10000 | 90-320 | 20,0 | 328 |

| Reduction in working load limits when side loads applied | | | | |
|--|----|--------|----------|----------|
| Angle measured from the vertical | 0° | 0°-15° | 15°- 30° | 30°- 45° |
| WLL reduction factor in % | 0 | 0 | 0 | 0 |

* The beam clamps can only be used up to an angle of 15 ° longitudinal to the beam. If the angle $\geq 15^\circ$ the beam clamp may not be used. For cross-beam applications the beam clamp can be used up to an angle of 45 ° without reduction to the working load if the beam fulfils the necessary conditions.

Disclaimer
 KITO does not assume liability for the inappropriate usage of products.
 Mistakes and errors reserved.

Contact
 Kito Europe GmbH / Heerdter Lohweg 93 / D-40549 Düsseldorf
 Tel. +49(0)211 - 52 80 09 - 0 / Fax +49(0)211 - 52 80 09 59
 info@kito.net / www.kito.net

Conform to the following Directives:
 EC Machinery Directive 2006/42/EC
 DIN EN 12100-1, DIN EN 12100-2
 DIN EN ISO 14121-1, DIN EN 13155,
 DIN EN 15018-2